


ESSENTIAL SMARTBRIGHT G3 LED FLOODLIGHT

FLOODLIGHT

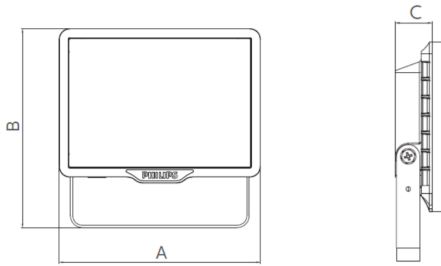

CE IP65

Features

System efficacy 85 lm/W
 Long lifetime, 20 khrs lifetime @ Ta 25°C
 Robust design, Die-cast housing, Front Glass

Application

Parking Area
 Landscape
 Billboard

Model

Model	BVP150-LED17	BVP150-LED25	BVP150-LED42	BVP150-LED59
Size (A x B x C)	140mm x 133mm x 28mm	170mm x 168mm x 29mm	200mm x 181mm x 33mm	245mm x 220mm x 36mm
Nominal Power	20W	30W	50W	70W
System Flux	1,700lm	2,550lm	4,250lm	5,950lm

* System lumen refers to typical lumen output of NW(4000K) product, it could result less lumen in WW(3000K) or higher lumen in CW(6500K).

Specifications

Model	BVP150-LED17	BVP150-LED25	BVP150-LED42	BVP150-LED59
Input Voltage	220-240V, 50/60Hz			
Beam angle	SWB(110°)			
Lifetime	20,000 hours (L70B50@25°C)			
CCT	3000K / 4000K / 6500K			
Weight (kg)	0.32 kg	0.50 kg	0.71 kg	1.13 kg
IP Rating	IP65			
Power Factor	> 0.9			
Color Index	> 80			
Materials & Finishing	Die-cast aluminium housing (black), Textured tempered glass			
Operating Temp.	- 40 °C < Ta < + 50 °C			
Mounting Type	Bracket mounting			
Standard	CQC, CE, CB, EMC			