


SMARTBRIGHT HIGHBAY G3

HIGHBAY

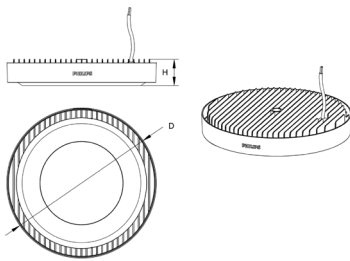

Features

High efficacy: 100 lumens per watt
The high-quality optical cover ensures good uniformity
Lifetime of 30,000 hours @ Ta35°C

Application

Factories
Warehouses
Workshops

Model

Model	BY239P LED60	BY239P LED100	BY239P LED150	BY239P LED200
Size (D x H)	244mm x 50mm	244mm x 50mm	344mm x 60mm	344mm x 60mm
Nominal Power	62W	100W	145W	190W
System Flux	6,000lm	10,000lm	15,000lm	20,000lm

* System lumen refers to typical lumen output of NW(4000K) product, it could result less lumen in WW(3000K) or higher lumen in CW(6500K).

Specifications

Model	BY239P LED60	BY239P LED100	BY239P LED150	BY239P LED200
Input Voltage	220-240V, 50/60Hz			
Beam angle	100°			
Lifetime	30,000 hours @ Ta350C			
CCT	4000K / 6500K			
Weight (kg)	1.5 kg	1.5 kg	3.5 kg	3.5 kg
IP Rating	IP65			
Power Factor	> 0.9			
Color Index	> 80			
Materials & Finishing	Housing: Dark Grey Aluminium Die-cast			
Operating Temp.	- 20 °C < Ta < + 45 °C			
Mounting Type	Pole and hook mounting			
Standard	CE			