


SMARTBRIGHT DIRECT PANEL

PANEL

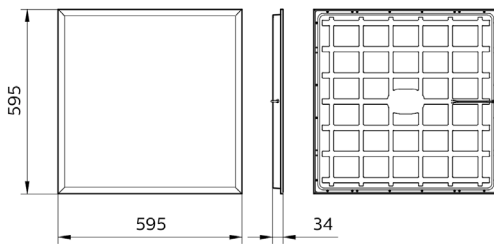

Features

88 lm/w luminous efficacy
Comfortable light with excellent uniformity
30,000 hours L70B50

Application

Office
School
Commercial

Model

| Model | RC048B-36W |
|------------------|--------------------|
| Size (W x H x D) | 595mm 595mm x 34mm |
| Nominal Power | 36W |
| System Flux | 3,200lm |

* System lumen refers to typical lumen output of NW(4000K) product, it could result less lumen in WW(3000K) or higher lumen in CW(6500K).

Specifications

| | |
|-----------------------|--|
| Model | RC048B-36W |
| Input Voltage | 220-240V, 50/60Hz |
| Beam angle | 120° |
| Lifetime | 30,000 hours |
| CCT | 4000K / 6500K |
| Weight (kg) | 1.88 kg |
| IP Rating | IP20 |
| Power Factor | > 0.9 |
| Color Index | > 80 |
| Materials & Finishing | Steel housing; Acrylate reflector; White finishing |
| Operating Temp. | - 10 °C to + 40 °C |
| Mounting Type | Recessed Mounting |
| Standard | CE, RoHS |

* Actual order code refer to datasheets