


SMARTBRIGHT LED STREETLIGHT

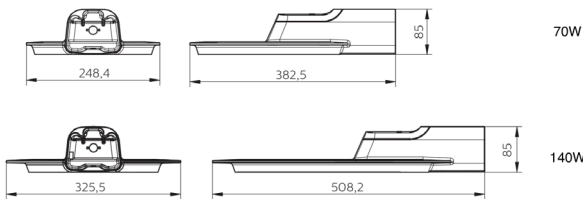

Features

100 lm/w luminous efficacy
Reliable design with die cast aluminium housing
30,000 hours L70 at 35°C Ta rated lifetime

Application

Residential Street
Walking / Cycling Path
Main Road

Model

Model	BRP130-70W	BRP132-140W
Size (W x H x D)	383mm x 248mm x 85mm	509mm x 326mm x 85mm
Nominal Power	70W	140W
System Flux	7,000lm	14,000lm

* System lumen refers to typical lumen output of NW(4000K) product, it could result less lumen in WW(3000K) or higher lumen in CW(6500K).

Specifications

Model	BRP130-70W	BRP132-140W
Input Voltage	220-240V, 50/60Hz	
Beam angle	Asymmetrical	
Lifetime	30,000 hours L70B50 @35C Ta outdoor	
CCT	3000K / 4000K / 5700K	
Weight (kg)	2.6 kg	4.2 kg
IP Rating	IP66	
Power Factor	> 0.9	
Color Index	> 70	
Materials & Finishing	Aluminium / Dark grey color	
Operating Temp.	- 40 °C < Ta < + 50 °C	
Mounting Type	Side entry (42~60mm)	
Standard	CB/CQC/As/NZS 60598/CE	