


SMARTBRIGHT WIDE LED WATERPROOF

WATERPROOF

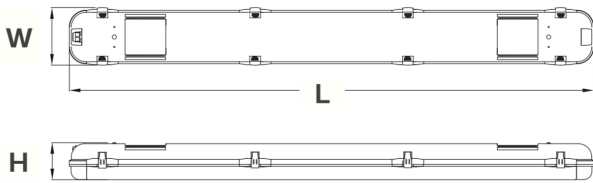

Features

Wider base for direct replacement of T8 battens
Multiple knock-out options, large terminal and through wiring possible
Reliable performance. Lifetime 30,000hours

Application

Warehouses
Back of House Area
Factories

Model

Model	WT008C LED20	WT008C LED40	WT008C LED60
Size (L x W x H)	650mm x 127mm x 86mm	1260mm x 127mm x 86mm	1560mm x 127mm x 86mm
Nominal Power	20W	40W	60W
System Flux	2,000lm	4,000lm	6,000lm

* System lumen refers to typical lumen output of NW(4000K) product, it could result less lumen in WW(3000K) or higher lumen in CW(6500K).

Specifications

Model	WT008C LED20	WT008C LED40	WT008C LED60
Input Voltage	220-240V, 50/60Hz		
Beam angle	110° - 130°		
Lifetime	30,000 hours		
CCT	4000K / 6500K		
Weight (kg)	1.25 kg	2.15 kg	2.45 kg
IP Rating	IP65		
Power Factor	> 0.9		
Color Index	> 80		
Materials & Finishing	Polycarbonate cover, Light grey finishing		
Operating Temp.	-20 °C < Ta < 50 °C		
Mounting Type	Surface Mounting		
Standard	CE, RoHS		